


# Goccia

## Ezimix Shower Mixer



aquatica

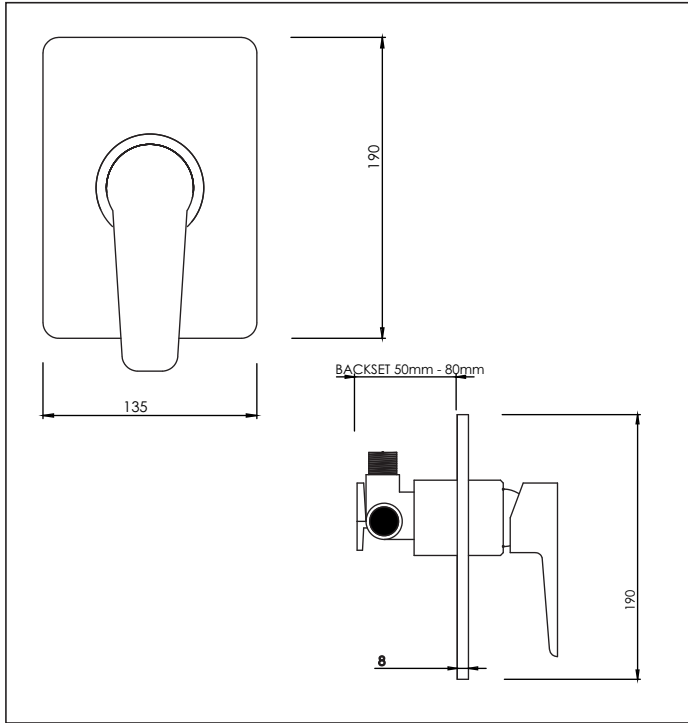

**Code: GO SHMEZI BLK**

**Finish:** Black Powder Coat

**Faceplate:** 135mm x 190mm x 8mm

**Barrel Diameter:** 54mm

**Backset:** (Mounting board to front of lining)

Minimum: 50mm

Maximum: 80mm

**Installation Hole Diameter:**

Minimum: 55mm diameter

**Water Inlets:** 1/2" BSP Male - Hot. Fitted with no return OV15 check valve  
1/2" BSP Female - Cold. 1/2" BSP male/male shower nipple supplied for flow control with unequal pressure systems

**Water Outlet:** Upper: 1/2" BSP Male

**Cartridge:** Mondo 45K raised base

**Note:** 2 year warranty on powder coated finish

### Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 20 - 600 kPa  
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

No WELS rating required

KIWI OWNED COMPANY

**NZ** • DESIGNED  
• ASSEMBLED  
• TESTED

**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.  
Tel: 09-828 2068,  
Fax: 09-828 2069  
Email: info@aquatica.co.nz  
or visit our website:  
[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019