

FULLY ADJUSTABLE RUN-ON FAN TIMER

**ORDER CODE:
FAN2444**


Fully adjustable fan timer that keeps the fan running to clear the residual steam after switching off lights

The adjustable 'Delay Start' and 'Run-On Timer' features provide full control of the fan's running time, to help ensure all stale air is cleared from the room.

Fits new or existing fans from 200W down to a low 20W. The timer can be used within the fan or in parallel with a light switch.

A delayed start avoids unnecessary start up of the fan when the bathroom lights are only switched on for short periods - ie washing hands.

Fully Adjustable Delayed Start	Run-on Time (after switching off)
1 sec - 5 minutes	1 sec - 90 minutes


 Some timers will not operate low watt fans. The Fully Adjustable Timer includes a convenient resistor allowing switching of fans 50W down to 20W.




Installation

Move the Dip Switches to the desired time that you want the wall switch Timer to run on after the wall switch is turned off. "Timing" and "Delay" adjustment knobs indicate levels 1-10. They do not represent minutes. Example: If the Dip Switches are set to the position marked "1 min - 1 hr 30 min" and the "Timer" knob is turned to "5" (i.e. 50%) the fan will run for approximately 45 minutes.

NOTE: *

 For fans under 50 Watts the included Resistor must be used with the timer used to ensure proper operation.

All installations must comply with the current electrical and building regulations as required by your local authority, and must be carried out by a registered electrician.

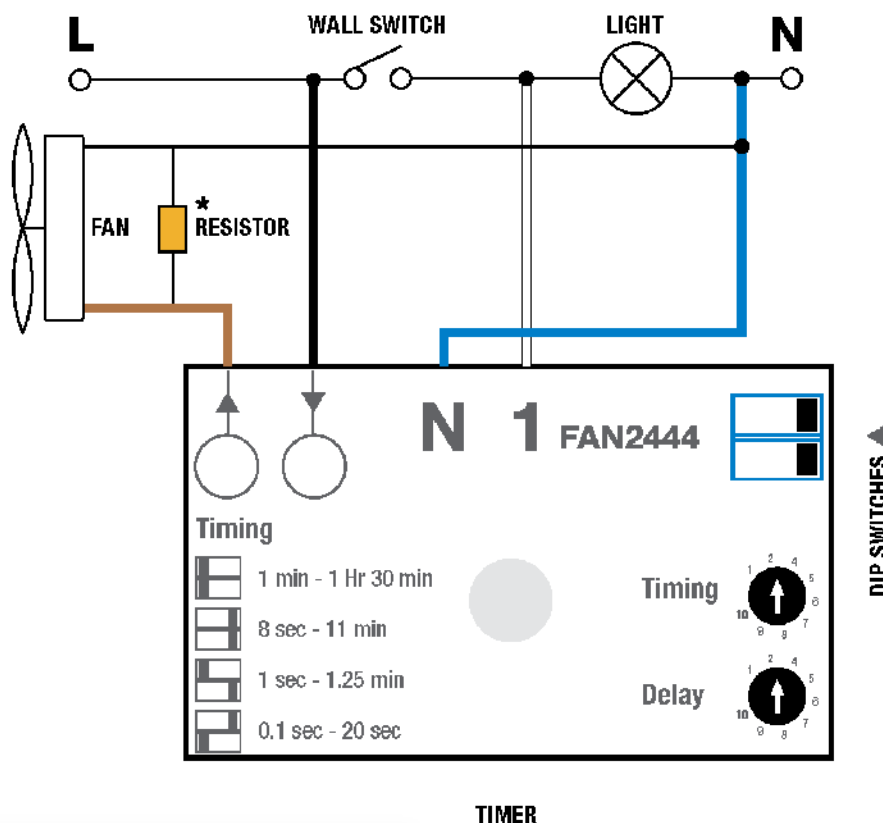

TIMER

A fan timer is a safer option to keep removing steam after you leave a bathroom, compared to leaving a window open!