


Kuchena

Gooseneck Sink Mixer

aquatica

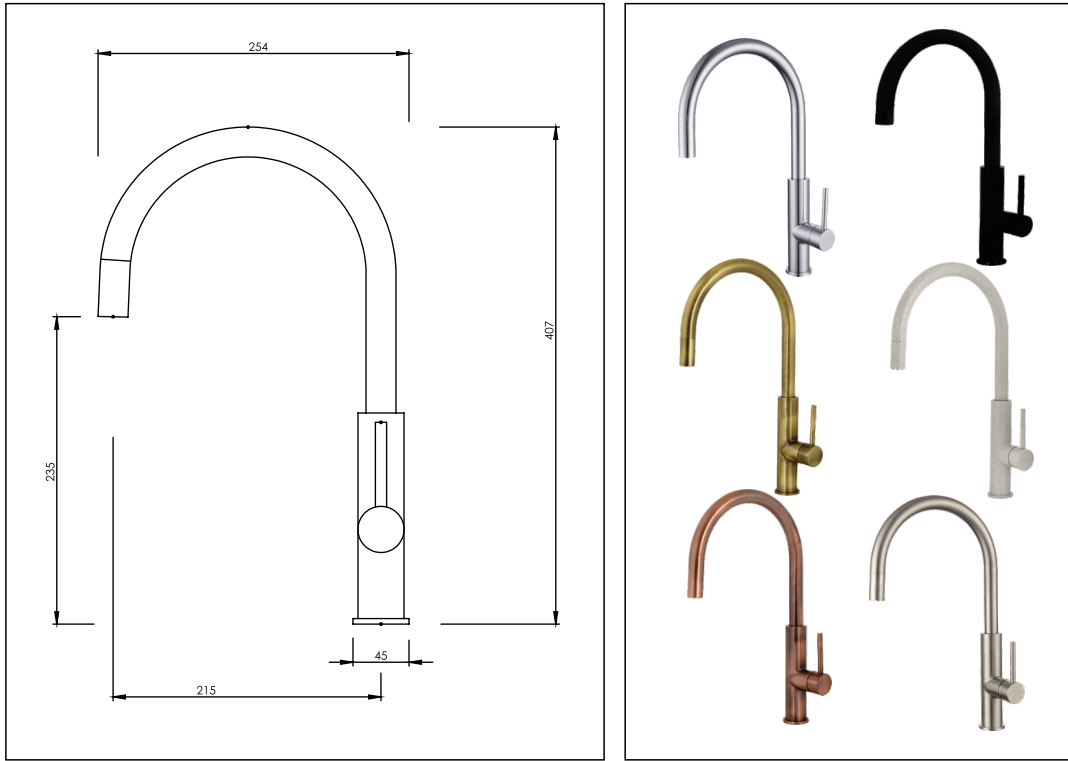

Code: KU SM GNECK BZ

Finish: Chrome / Black / Bronze / Oatmeal / Copper / Brushed Nickel

Spout: Cast, Swivel 360°

Water Outlet: Cache perlator HC PCA fitted

Stainless Steel Inlet Hoses:

Size: M10 x 1/2" BSP

Installation Hole Diameter: Minimum: 33mm
Maximum: 36mm
Maximum bench thickness: 26mm

Mounting Hardware: 32mm brass tube and backnut 35mm A/F

Dress ring supplied with O-ring seal

Cartridge: Sedal 25mm flat base

Flow rate: 8 l/min PCA Fitted for regulated flow \pm 10% with mains pressure system
Max. hot @35kPa = 2.5 l/min



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation