


# Kuchena

## Gooseneck Sink Mixer

aquatica

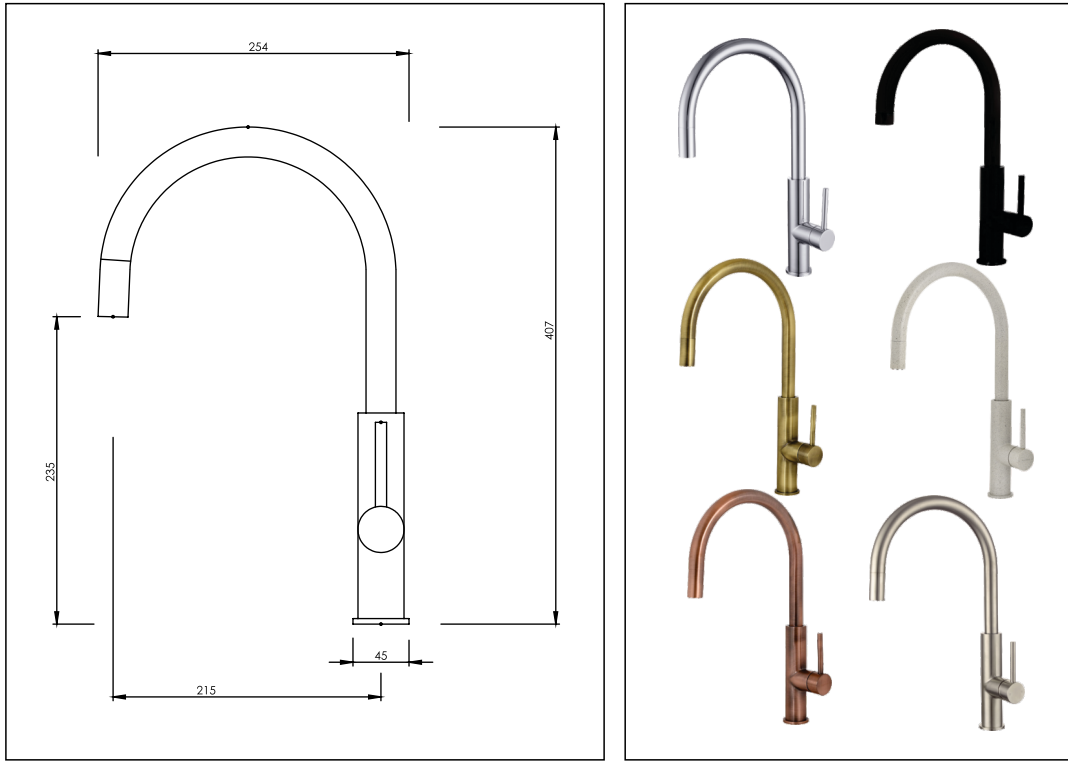

**Code:** KU SM GNECK CPR

**Finish:** Chrome / Black / Bronze / Oatmeal / Copper / Brushed Nickel

**Spout:** Cast, Swivel 360°

**Water Outlet:** Cache perlator HC PCA fitted

**Stainless Steel Inlet Hoses:**

Size: M10 x 1/2" BSP

**Installation Hole Diameter:** Minimum: 33mm  
Maximum: 36mm  
Maximum bench thickness: 26mm

**Mounting Hardware:** 32mm brass tube and backnut 35mm A/F

Dress ring supplied with O-ring seal

**Cartridge:** Sedal 25mm flat base

**Flow rate:** 8 l/min PCA Fitted for regulated flow  $\pm$  10% with mains pressure system  
Max. hot @35kPa = 2.5 l/min



KIWI OWNED COMPANY

**NZ** • DESIGNED  
• ASSEMBLED  
• TESTED

**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz  
or visit our website:

[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019

**Suitable for mains pressure only**

Recommended Operational Pressure Range: 150 - 600 kPa  
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



*Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation*