


SPARE PARTS LIST

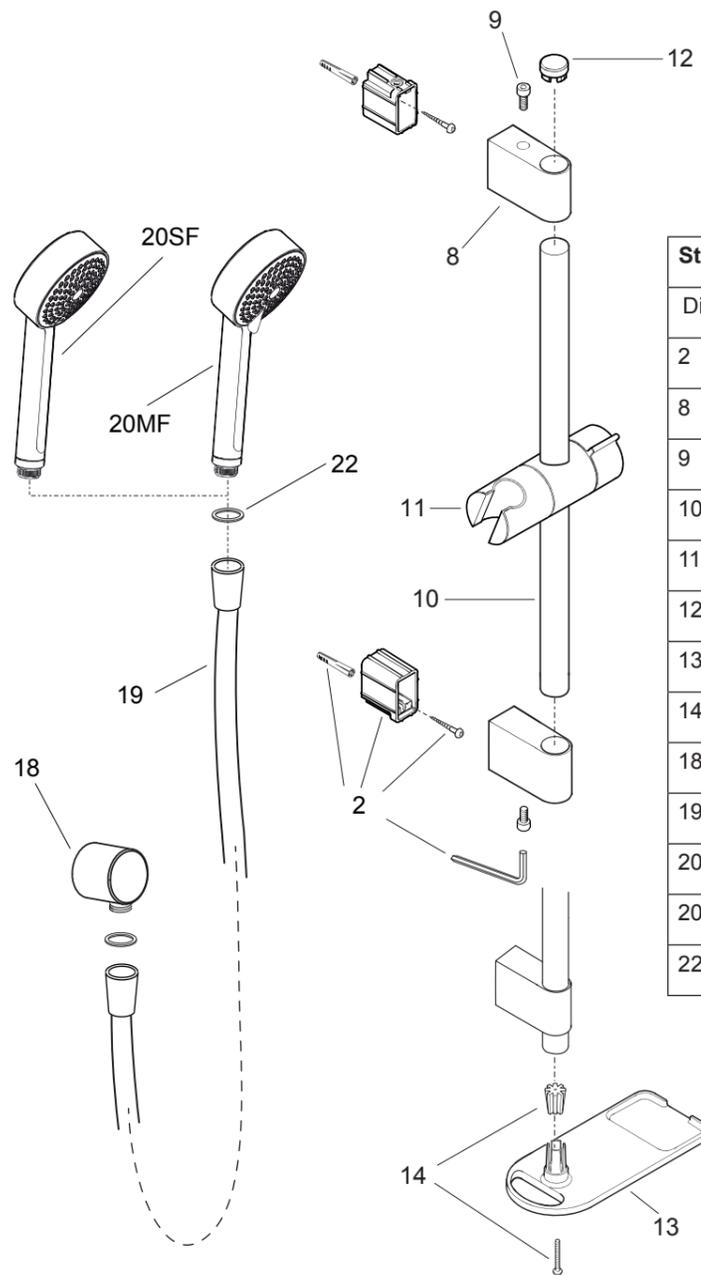

Studio Slide Shower Single/Multi-Function Spare Parts

Diagram #	Description	Part #
2	Mounting Bracket Kit (x2)	1239236
8	Slide Bar Support (x2 - Chrome)	1239244
9	M4 Screws (x2)	1239237
10	Slide Bar - 680mm	1239243
11	Clamp Bracket - Chrome	1239242
12	Cap (x2)	1239238
13	Soap Dish	1239246
14	Taper Block	1239247
18	Wall Elbow	1241295
19	Metal Shower Hose (1.25m)	1239245
20SF	Handset (Single Mode - Chrome)	1239239
20MF	Handset (Multi Mode - Chrome)	1239240
22	Hose Seal (x2)	1239241

CONTACT AND WARRANTY INFORMATION

NEW ZEALAND
KOHLER NZ LTD

Free Ph: 0800 100 382
Free Fax: 0800 664 488
www.Englefield.co.nz

AUSTRALIA
KOHLER CO.

Free Ph: 1 800 ENGLEFIELD
(1 800 364 533)
www.Englefield.com



For warranty information, please visit our website

INSTALLATION INSTRUCTIONS



TAPWARE

STUDIO Slide Shower

Single function: 5622A
Multi function: 5623A



If you are building a bathroom from scratch, giving your bathroom a makeover or just replacing an old tap, Englefield can provide a solution for you.

BEFORE YOU BEGIN


All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.

NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. An in-line water filter must be used with this product.
3. The highest working pressure for the handspray is 0.5Mpa(5 bars). If it exceeds 0.5Mpa(5 bars), a pressure reducer is needed. The highest water and environment temperature is 60°C. Please keep the handspray away from any heater, or it may become damaged and cause injury to the user.
4. Don't remove the flow controller or the hand shower will be damaged.
5. The slide bar must be mounted to stud framing supports at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the slide bar.
6. Observe local plumbing codes.
7. Recommended working pressure: 1 to 5 bars.
8. All installations should comply with the relevant requirements of AS/NZS 3500 and AS/NZS 6400.


ROUGH-IN

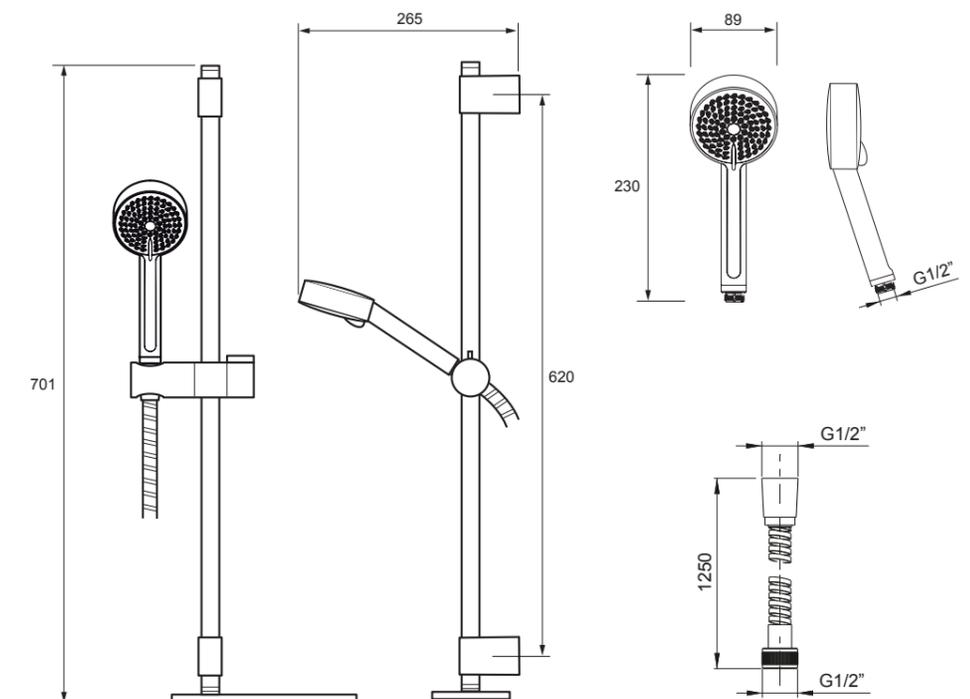

INSTALLATION


How to Install the Slide Bar

- 1.) Decide on a suitable position for the slide bar avoiding buried cables and pipes in the wall.
- 2.) Mark the wall fixing hole position for the top of the slide shower and drill a hole to suit the bracket(2). Insert anchor(1) into the hole.
- 3.) Fix bracket(2) to the wall using screw(3).
Note: The hole in bracket(2) for cover screw(9) must face up.
- 4.) Slide the handspray holder(11) onto the bar(10) and adjust the holder to the centre of the bar.
- 5.) Slide the covers(8) onto the slide bar(10) so that they are about 10mm from each end and loosely tighten the fixing screws(7).
- 6.) Rehearse installation using the slide bar(10), brackets(2 & 5) and covers(8).
Note: Adjust location of covers if necessary. Mark the outline of the lower bracket(5) on the wall and find the position of the hole. Carefully remove the bar assembly and tighten the fixing screws(7) to lock the covers in place.
- 7.) Drill a hole to suit bracket(5). Insert anchor(4) into the hole.
- 8.) Fix bracket(5) to the wall using screw(6).
Note: The hole in bracket(5) for cover screw(9) must face down.
- 9.) Slide the covers(8) onto the brackets(2 & 5) and fix both covers in place using cover screws(9).
- 9.) Insert the endcap(12) into the top of the slidebar(10).

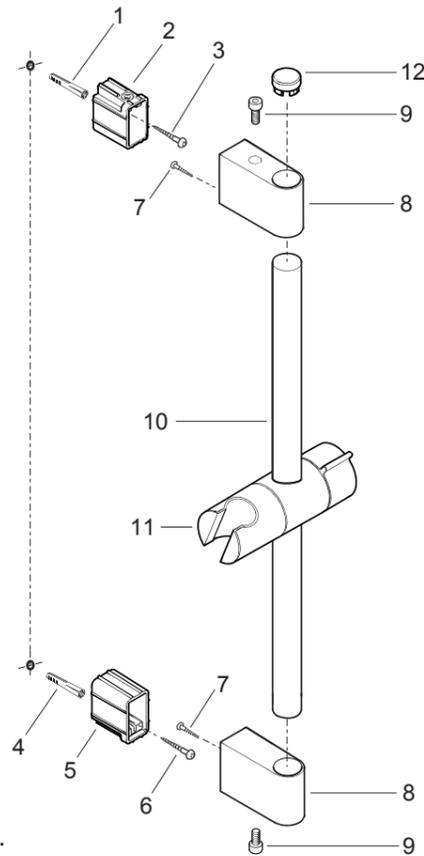

How to Install the Soap Dish



- 1.) Insert the soap dish(13) with plastic insert(14) into the bottom end of the slide bar(10) and fix in place using screw(15).
Note: Be careful not to overtighten.

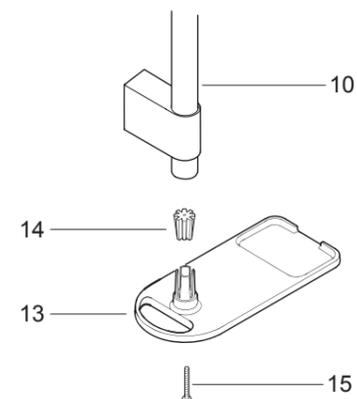

How to Install the Elbow and Handspray


NOTE: To perform installation the installer must provide a G1/2" water supply nipple(16). Distance from the end of the nipple to the finished wall surface should be between 10 and 13mm and perpendicular to the wall.

- 1.) Apply tape or thread sealant to the threads of the water supply nipple(16).
- 2.) Apply a ring of plumber's putty or sealant around the back surface of the elbow(17).
- 3.) Thread the elbow(17) onto water supply nipple. Adjust and make sure the outlet(18) faces down.
- 4.) Tighten hose(19) with seals(22) to elbow outlet(18) and to handspray(20).
Note: Make sure hose goes through the soapdish(13).
Note: For low pressure situations the flow restrictor(21) can be removed using a tool such as a toothpick.
- 5.) Hang handspray on handspray holder(11).

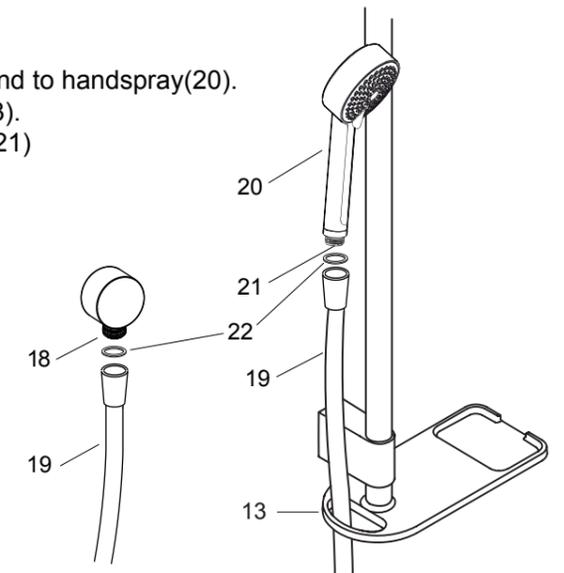

INSTALLATION CHECKOUT

- 1.) Ensure that all connections are tight.
- 2.) Turn on the main water supply and check for leaks. Repair as needed.
- 3.) Remove the handspray(20) and run water through the hose(19) for about one minute to remove any debris. Remove any debris from the handspray, shut off the main water supply and reinstall the handspray.
- 4.) The height of the handspray holder(11) can be adjusted by twisting the lever and sliding the holder up or down.



CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Englefield faucets and fittings.