

Product

- Aleo Thermostatic Dual Shower Column

Kohler Code

97822T-9E-CP



Included Components

- 250mm round catalyst super-slim rainhead
- Shower column with diverter
- 1.5m PVC hose
- Renew® 3-function handshower

Features

- Direct connection column contemporary design with easy installation
- Precise temperature control with thermostatic valves
- Large size Katalyst rainhead with zero-dripping technology
- Polished chrome
- Solid Metal construction for durability and reliability
- Suitable for mains pressure
- KOHLER finishes resist tarnishing and corrosion




NZ WELS RATING
(3 Star 9 Litres / min)

Related Products

- Aleo tapware
- Aleo accessories

Technical Details

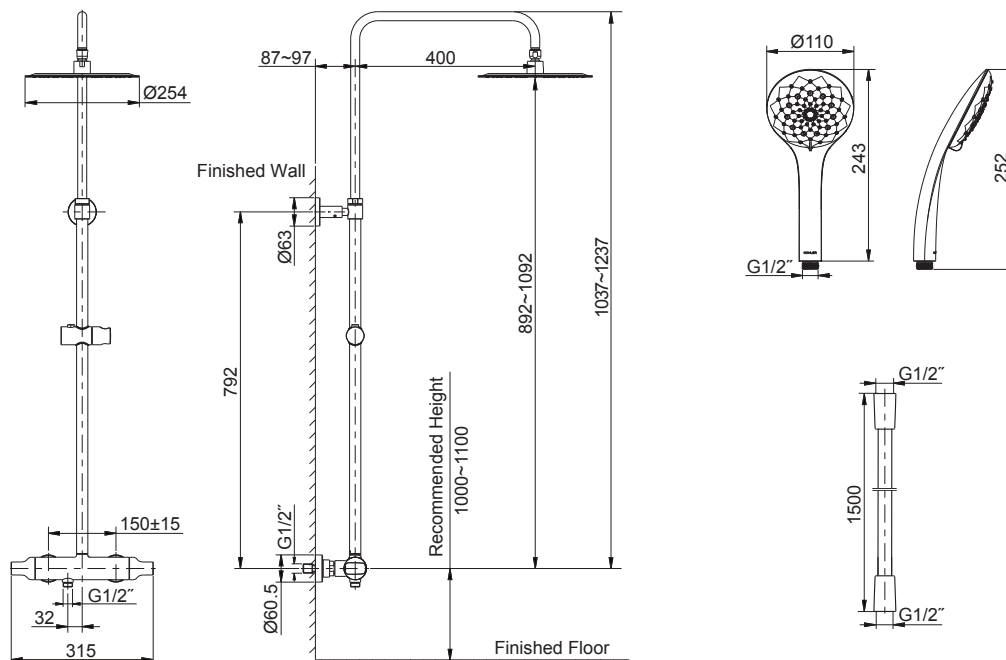

All dimensions in millimeters

Installation Notes:

- Optimum working pressure 300-500 kPa.
- Hot water temperature, minimum: 50°C, maximum: 80°C, recommended temperature: 65°C.
- Mixed water temperature setting range: approximately 20°C to 49°C.
- Inline filters must be used to protect tapware from debris that may be present within the plumbing.