


Eco-Smarte

Ezimix Shower Mixer

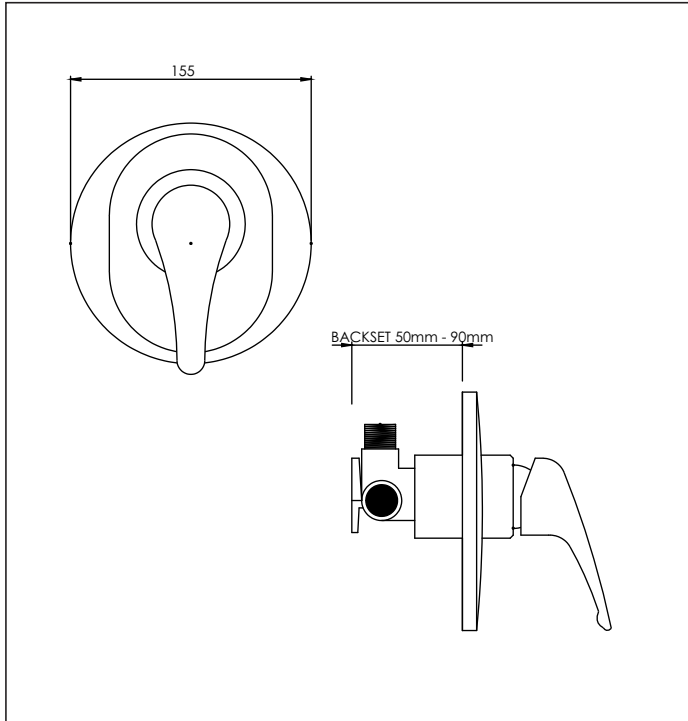

Code: SM SHMEZI

Finish: Chrome

Faceplate: 155mm diameter depressed plate

Barrel Diameter: 54mm

Backset: (Mounting board to front of lining)

Minimum: 50mm

Maximum: 80mm

Installation Hole Diameter:

Minimum: 55mm diameter

Water Inlets: 1/2" BSP Male - Hot. Fitted with no return OV15 check valve
1/2" BSP Female - Cold. 1/2" BSP male/male shower nipple supplied for flow control with unequal pressure systems

Water Outlet: Upper: 1/2" BSP Male

Cartridge: Mondo 45K raised base

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 20 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

No WELS rating required

aquatica



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019