


## Ceiling Mounted Shower Drencher (Round) Brushed Nickel **VECL81RCBN**

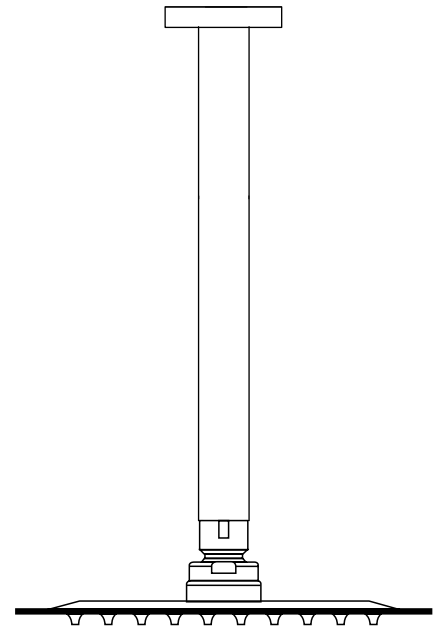

Congratulations on your purchase of this high quality product from Voda Plumbingware.  
Please read the following before installation and retain (along with your receipt) for future reference.

### TECHNICAL SPECIFICATIONS

#### Suitable for Mains Pressure Only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

### CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low Systems This product is not suitable for this type of water pressure.

Equal Low systems This product is not suitable for this type of water pressure.

### INSTALLATION

**For pressures exceeding 500kPa install a pressure reducing valve. Failure to do so may void the warranty.**

- Cut G1/2" screwed tube (nipping) to allow for a minimum 10mm inlet protrusion
- Use a liberal amount of thread tape on the inlet nipple to ensure a secure seal
- Turns on water supply
- Check for leaks

Note: This shower rose has a flow controller attached between the arm and the rose. If a greater water flow is required, you can remove this controller - however if removed, this product will no longer achieve a WELS rating of 3 stars.

ATTACH PROOF OF PURCHASE HERE

#### WARRANTY

**PLEASE CALL US BEFORE REMOVING TAPWARE OR UNDERTAKING ANY REPAIR WORK.**

Please refer to our website for warranty information: [www.vodaplumbingware.co.nz/warranty](http://www.vodaplumbingware.co.nz/warranty)

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

#### CARE AND MAINTENANCE

**NOT TO BE CLEANED WITH ASTRINGENT, ABRASIVE OR CITRIC CLEANERS.**

A soft, damp cloth is recommended for cleaning. Mild soap solutions can also be used on occasion.

Try to avoid excessive scrubbing as this could cause damage and void your warranty.