


Ecomix Cast Spout Sink Mixer **VECM011**

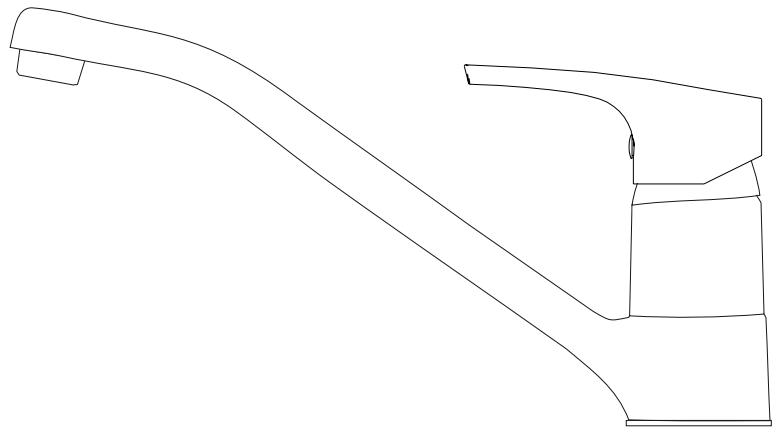

Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for All Pressures

Minimum Pressure = 17kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Remove the valve insert from valve nipple and change aerator to the WELS one (supplied).

Unequal Low systems Ensure valve nipple is attached to cold in-feed hose (flow arrow aligned to the water flow).

Equal Low systems Remove all the valve insert from the valve nipples.

INSTALLATION

For pressures exceeding 500kPa, install a pressure limiting valve. Failure to do so may void the warranty.

- Position tap in 35mm hole, making sure the seal between tap and supporting surface is in place.
- Anchor to bench with fittings pack.
- Thoroughly flush all pipes to eliminate any remaining dirt and residue and install inline filters.
- Connect supply hoses to plumbing connections. Note: When fitting the Hot supply flexi-hose (bigger bore hose with pipe extension), please ensure the O ring on the spigot end beds into the body recess (ie. the shoulder face of the tube extension tightens to the base face).

Minimum bend for flexible hose is 35mm radius.

Do not stretch, crush or twist hoses. Do not swage hose ends.

- Turn on mains supply.
- Check for leaks.

Plumbers Note: Do not pressure test this mixer under static pressure.

ATTACH PROOF OF PURCHASE HERE

TROUBLESHOOTING

1. Hot flow is overriding hot pressure: Regular nipple has not been attached to the cold supply hose.
2. Water flow is slower than 5 litres per minute on Hot supply side: Aerator is partially blocked, remove and clean.
3. Mixer will not shut off: Cartridge nut needs tightening or the cartridge may have been damaged by dirty water.

WARRANTY

Please refer to our website for warranty information: www.vodaplumbingware.co.nz/warranty

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

When cleaning this product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.