


Soul Bath Spout **VSU050**

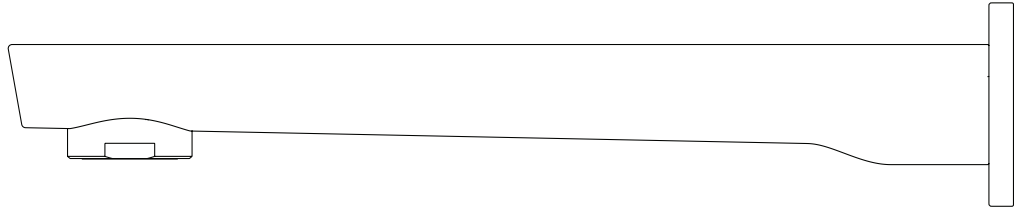

9 421027 596313

Congratulations on your purchase of this high quality product from Voda Plumbingware.
Please read the following before installation and retain (along with your receipt) for future reference.

TECHNICAL SPECIFICATIONS

Suitable for Mains Pressure only

Minimum Pressure = 150kPa

Maximum operating Pressure = 500kPa

Maximum operating Temperature = 65 deg. Celsius

For domestic use only.

CONFIGURATION

Mains Pressure systems Install as supplied.

Unequal Low systems Not suitable.

Equal Low systems Not suitable.

INSTALLATION

- Remove the brass mounting adaptor from the spout by un-screwing the grub screw underneath the spout.
- Install the adaptor onto the wall spigot, and tighten.
- Fit the spout onto the adaptor and tighten the grub screw back on.
- Turn on the water and check for leaks.

ATTACH PROOF OF PURCHASE HERE

WARRANTY

Please refer to our website for warranty information: **www.vodaplumbingware.co.nz/warranty**

In the unlikely event that this product fails during its warranty period, phone our Customer Service team immediately on 0508 367 366 – as unauthorised removal of the product may void the warranty.

CARE AND MAINTENANCE

When cleaning your Voda product (including chrome, stainless steel, coloured or any other surface coating) you must not use any type of astringent, abrasive or citric cleaners.

We recommend using only a soft, damp cloth and on occasion a mild soap solution. Try to avoid excessive scrubbing as this could cause damage and void your warranty.