


Deluna

Vessel Mixer

aquatica

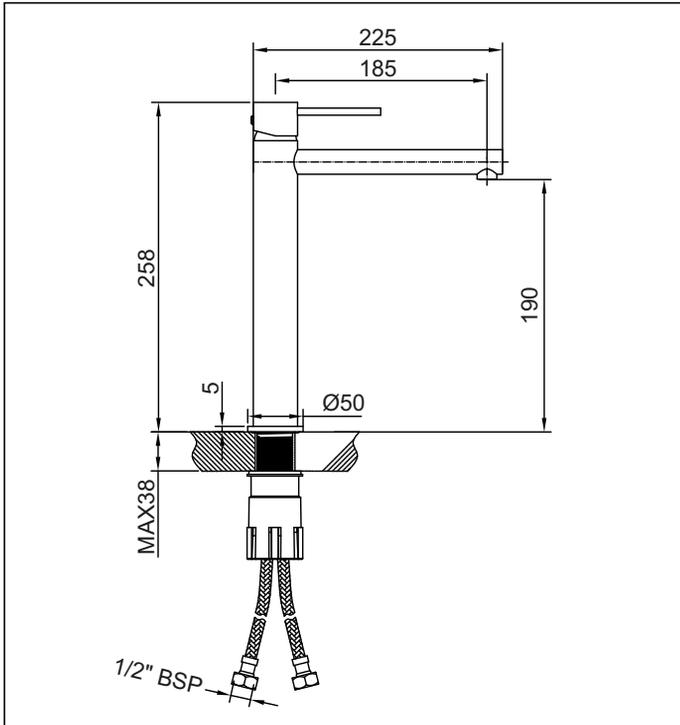

Code: DE VM SS

Finish: Brushed Stainless

Spout: Fixed

Stainless Steel Inlet Hoses:

Size: M10 x 1/2" BSP

Length: 500mm

Base Ring supplied with custom flat seal

Water Outlet: M18 ring with PCA fitted

Mounting Hardware:

34mm x 1.5mm Brass tube and back nut with 2x M6 lock screw

Installation Hole Diameter:

Minimum: 32mm

Maximum: 36mm

Max Bench Thickness: 38mm

Cartridge: Kerox 35mm Raised base high O-ring

Flow: 7 l/min PCA fitted for regulated flow with mains pressure system

Max hot @ 35kPa = 4.6 l/min

Max hot @ 35 kPa with PCA = 2.9 l/min

KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

