


Goccia Black

Basin Mixer 35

aquatica

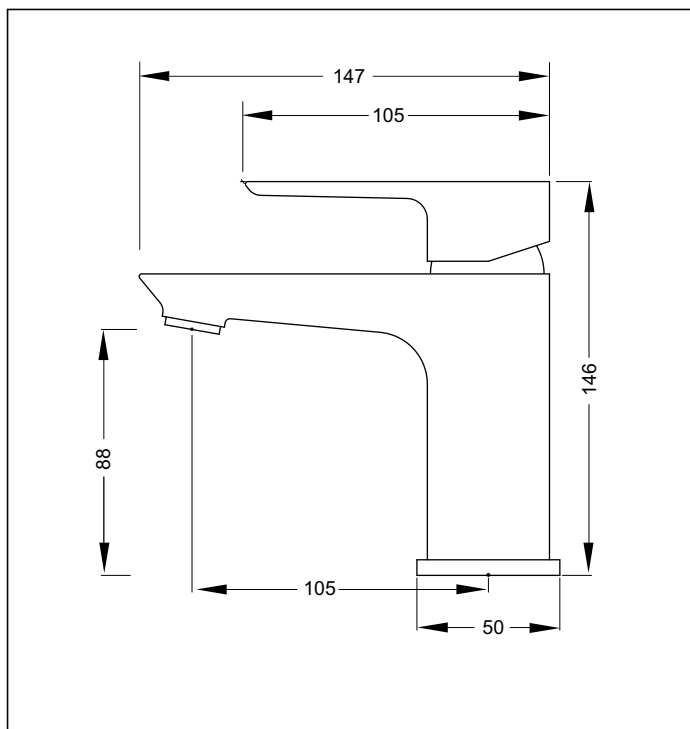

Code: GO BASMAP BLK

Finish: Powder Coated Black

Spout: Fixed

Water Outlet: M24 ring with standard insert

Stainless Steel Inlet Hoses:

Hot: Size: M10 x 1/2" BSP
Length: 400 mm

Cold: Size: M10 x 1/2" BSP
Length: 400 mm

Base Ring supplied with custom flat seal

Mounting Hardware:

Stud: 8 mm

Nut: 2 x 11 mm A/F

Horseshoe washer

Installation Hole Diameter:

Minimum: 34 mm

Maximum: 40 mm

Cartridge: Kerox 35mm Raised base High O-ring


Flow Control: 7 l/min PCA fitted for regulated flow with mains pressure system

Max hot @ 35kPa = 8 l/min

Note: 2 year warranty on powder coated finish

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



KIWI OWNED COMPANY

NZ

• DESIGNED
• ASSEMBLED
• TESTED



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz
or visit our website:

www.aquatica.co.nz

© copyright Aquatica 2019