



## Sanishower®+

The low profile design enables the Sanishower®+ to be installed discreetly into a cabinet. Ideal for installing a shower and vanity.



### WHY CHOOSE THIS PRODUCT?

Overcomes gravity drainage issues

Allows basement showers

Can be fitted next to shower tray


Additional inlet for basin

Includes integrated carbon filter

Low activation level (65 mm)


### VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

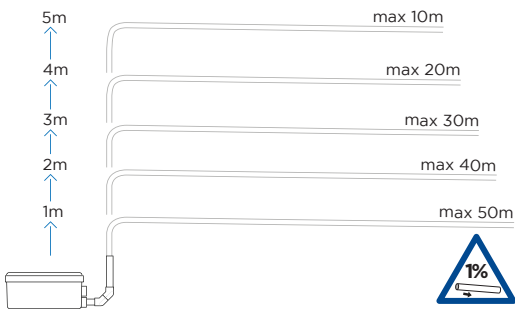


### TECHNICAL CHARACTERISTICS

<b>Discharge Pipework</b>	20 mm
<b>Motor Power</b>	400 Watts
<b>Voltages</b>	220-240 V/50 Hz
<b>Working Waste Water Temp</b>	35°C
<b>Product Weight</b>	3.5 kg
<b>Overall Measurements</b>	296 x 145 x 165 mm
<b>Inlet Pipework</b>	40 mm
<b>IP Rating</b>	IP44
<b>Activation Level</b>	65 mm

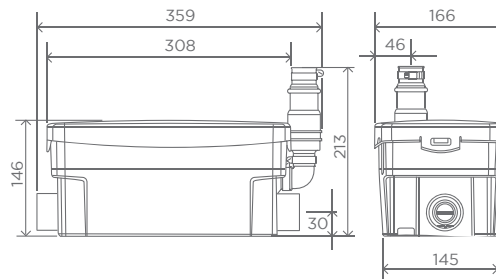

### FLOW RATE PERFORMANCE CHART

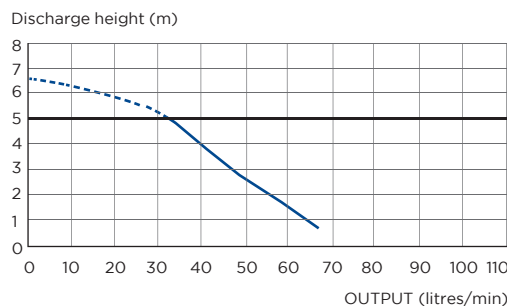

### APPLICATIONS



HAND BASIN



SHOWER



WMTS 106:2019  
 Certificate No. 23048  
 Manufacturer: SFA  
 Brand: Saniflo

PRODUCT REFERENCE:  
**SA94**

