

HWC TUNDISH

ALLPROOF
INDUSTRIES

HWCT40
& HWCT50

Designed to drain hot water cylinder valves through the safe tray.

SUITABLE
UP TO
130°C

Rubber Seal

Rubber
Compression
Washer

40/50mm BSP
Threaded Outlet

Rubber Grommet
to Suit 15mm and
20mm Copper
Pipe Sizes

Pipe Outlet
Locators


Grate Providing Air
Gap Separation &
to Contain Splash

Cone Tundish

Drainage for
Cylinder Tray

Safe Tray


40/50mm BSP
Threaded Nut

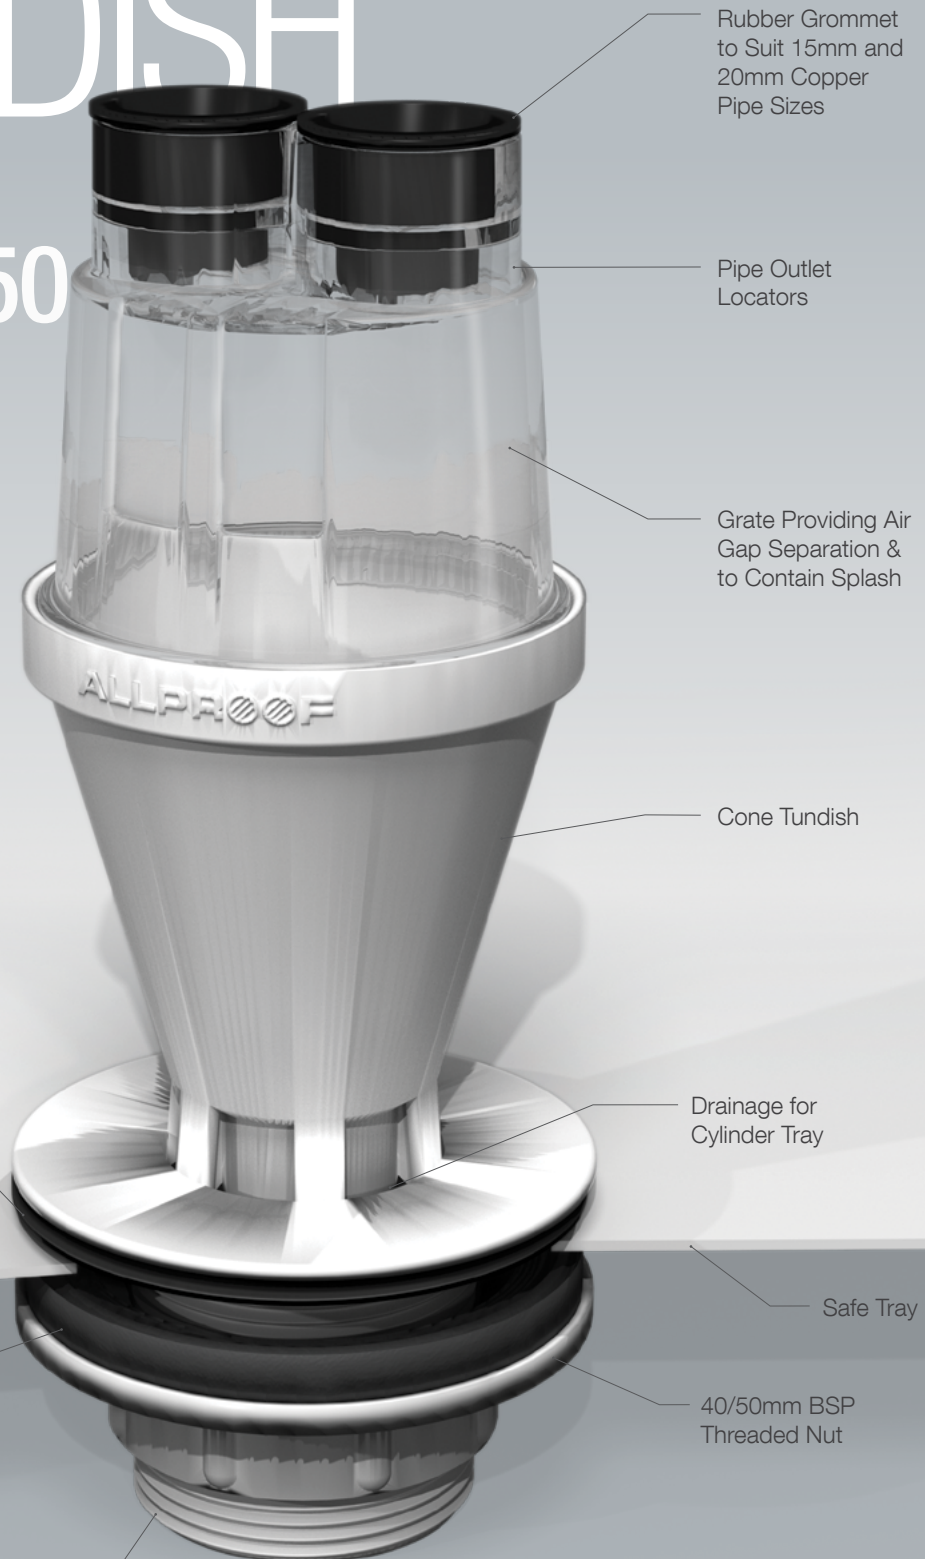

allproof.com

HWC TUNDISH

ALLPROOF
INDUSTRIES

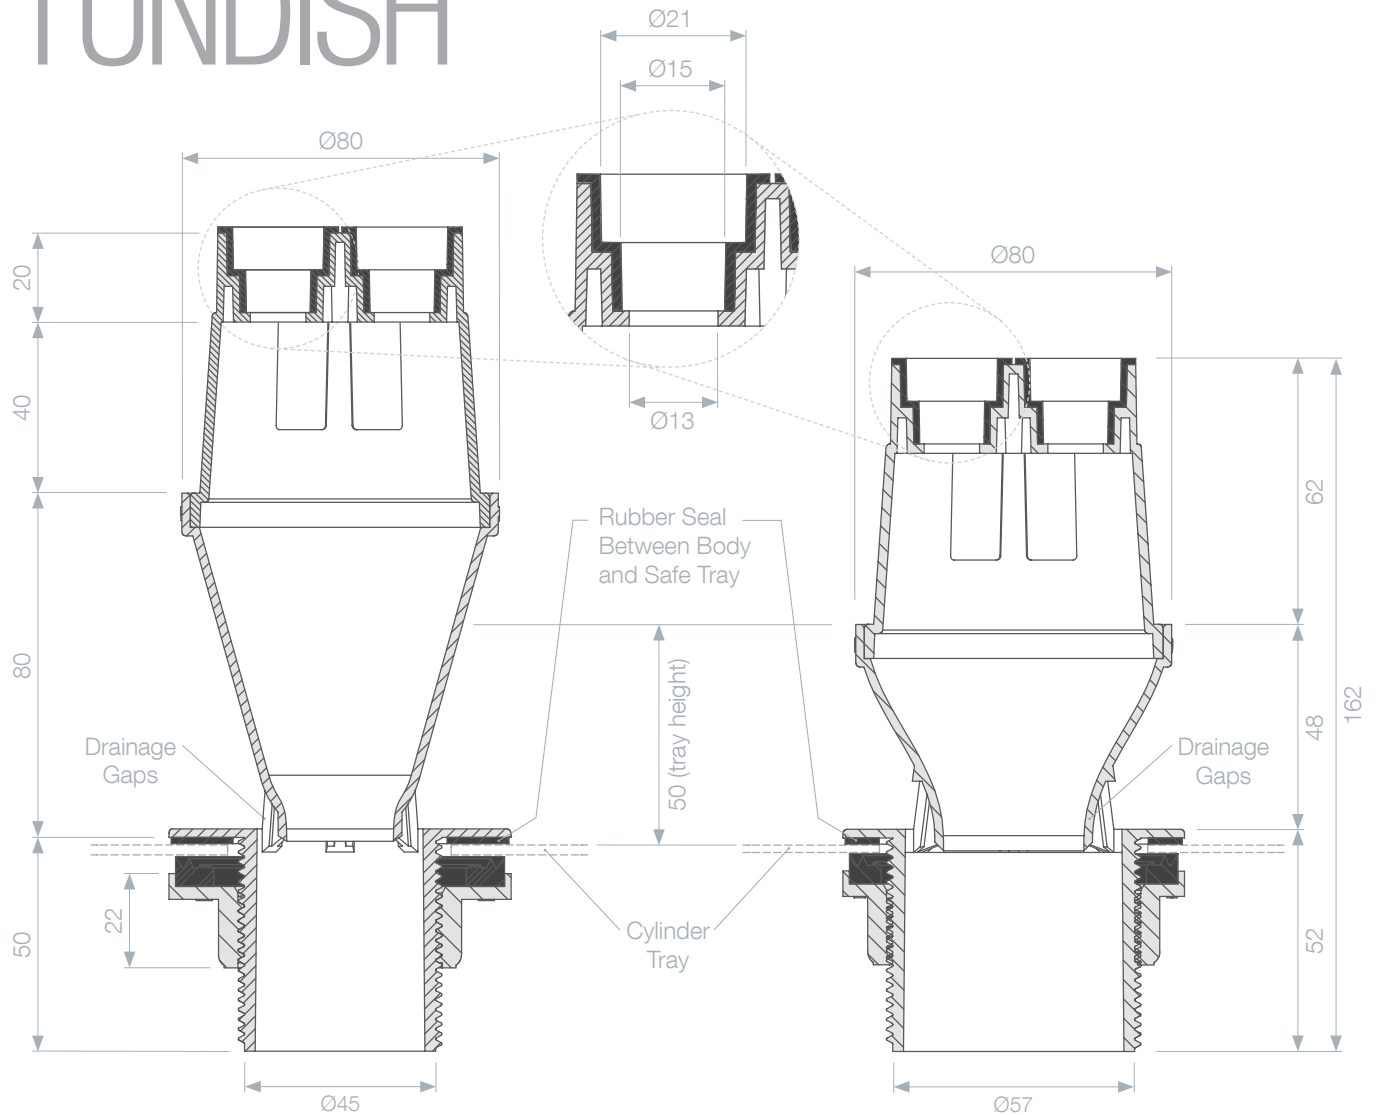

HWCT40

HWCT50



HOT WATER CYLINDER TRAY TUNDISH

- > Drains cold water expansion and TPR valve drainage pipes with one outlet
- > 40mm or 50mm BSP threaded outlet
- > Easy to install in HWC safe tray
- > Grate with pipe outlet locators meets minimum air gap requirement as per AS/NZS 3500.2
- > Grommet with diminishing ID for 20mm and 15mm pipe
- > Body and Grate moulded in high temperature rated plastic
- > Grate design to contain high pressure valve drainage and allow visual checks