


Link

Wall Mounted Shower Centre

aquatica

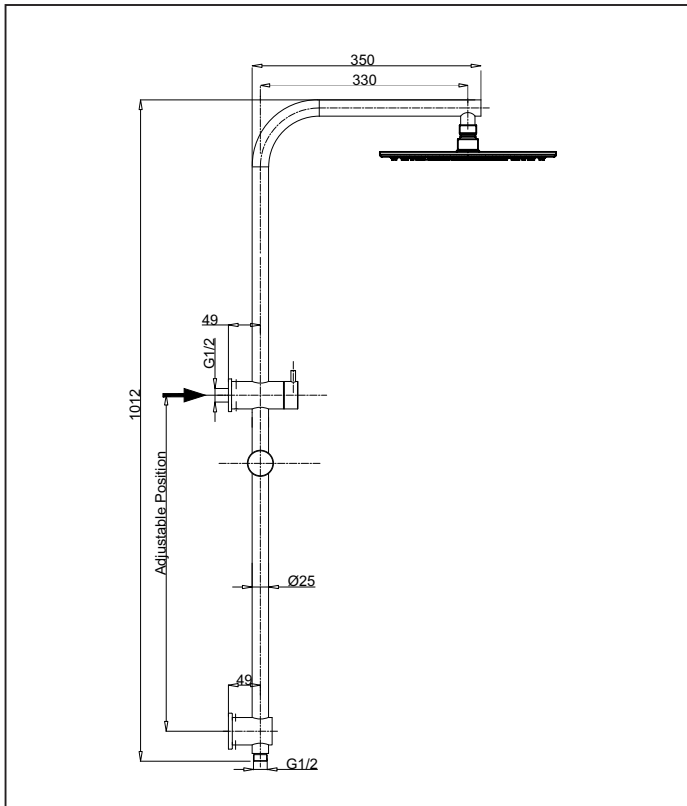

Code: LK SHC CH	LK SHC BLK	LK SHC GM	LK SHC BN
Finish: Chrome	Black	Gun Metal	Brushed Nickel

Water Outlet : Rain Head: 250mm Diameter
 Hand Shower: Single spray
 Spray pattern @ Head = 45 x 18mm (Rectangle Pattern)
 Spray pattern @ 500mm from Head = 130 x 70mm (Rectangle Pattern)

Hose: Construction: Metal Wide Bore
 Length: 1.5m

Water Inlet : Rain Head: 1/2" BSP female thread
 Hand Shower: 1/2" BSP Male thread
 Divertor inlet: 1/2" BSP female thread. Can be either upper mounting point or lower mounting point depending on desired rail setup

Divertor : Rotate 180 degrees to divert to rainhead/handshower
 Note: Cannot have both outlets on together

Cartridge : 22mm Divertor Cartridge

Mounting: Rail mounting position centre to centre is adjustable. When water inlet is @ bottom of rail top end post can be mounted anywhere.
 Note: See MT SHC instruction sheet for more detail mounting installation guide.

Flow Control: PCW 9's fitted in both Handshower and rainhead for regulated flow with main pressure system

Feature: Rail can be setup in two different configurations:
 1. Water inlet @ bottom of rail
 2. Water inlet @ top of rail

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
 Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



KIWI OWNED COMPANY

NZ • DESIGNED
 • ASSEMBLED
 • TESTED

Aquatica NZ Limited

9 Saunders Place,
 Avondale, Auckland.
 Tel: 09-828 2068,
 Fax: 09-828 2069
 Email: info@aquatica.co.nz
 or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019