


# Mia2

## Sink Mixer Gooseneck

aquatica

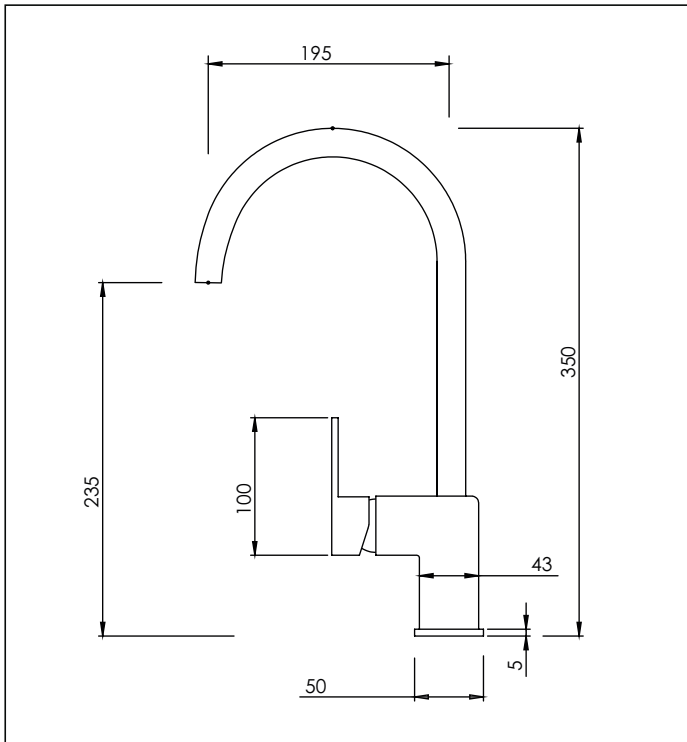

**Code:** MI2 SM GNECK | MI2 SM GNECK BLK

**Finish:** Chrome | Black

**Spout:** Swivel 360°

**Water Outlet:** M16.5 cache PCA fitted

**Stainless Steel Inlet Hoses:**

Size: M12 x 1/2" BSP

**Mounting Hardware:** Stud: 1 x 8 mm

Nut: 12mm A/F

Horseshoe washer

**Installation Hole Diameter:** Minimum: 28mm

Maximum: 38mm

**Max Bench Thickness:** 46mm

**Cartridge:** Kerox 35mm Flat Base

Dress ring supplied with base seal

**Flow:** 8 l/min PCA fitted for regulated flow  $\pm$  10% with mains pressure system

Max hot @ 35 kPa = 5.6 l/min



KIWI OWNED COMPANY

**NZ** • DESIGNED  
• ASSEMBLED  
• TESTED

**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.

Tel: 09-828 2068,

Fax: 09-828 2069

Email: info@aquatica.co.nz

or visit our website:

**www.aquatica.co.nz**

© copyright Aquatica 2019



**Suitable for mains pressure only**

Recommended Operational Pressure Range: 150 - 600 kPa

Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa

*Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation*