

# TECHNICAL DATA

## GENERAL INFORMATION


| Models  | Fan Cut-Out Size | Exterior Grille       | Duct Type            | Duct Length |
|---------|------------------|-----------------------|----------------------|-------------|
| XPLP125 | 140mm            | White Gravity Shutter | Aluminium Semi-Rigid | 375mm       |
| XPLP150 | 173mm            | White Gravity Shutter | Aluminium Semi-Rigid | 375mm       |

Please note: Fan cut out size is a nominal diameter.

## DIMENSION INFORMATION (mm)

| Models  | A   | B   | C   | D  | E   | F   | G   | H   | I  |
|---------|-----|-----|-----|----|-----|-----|-----|-----|----|
| XPLP125 | 161 | 118 | 128 | 10 | 160 | 125 | 375 | 123 | 30 |
| XPLP150 | 191 | 150 | 132 | 10 | 174 | 150 | 375 | 148 | 30 |


### ► Dimensions - XPLP

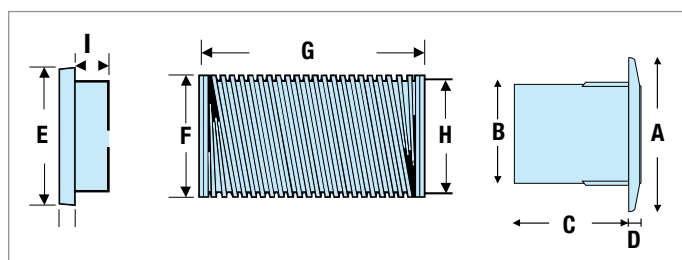

## TECHNICAL SPECIFICATION

| Models              | XPLP125                       | XPLP150                       |
|---------------------|-------------------------------|-------------------------------|
| Power               | 220 - 240V (LV models 12V)    | 220 - 240V (LV models 12V)    |
| Fan Performance     | 36 l/s, 130m <sup>3</sup> /hr | 87 l/s, 313m <sup>3</sup> /hr |
| Fan Wattage         | 20W                           | 25W                           |
| Maximum Pressure    | 35 Pa                         | 60 Pa                         |
| Fan Speed           | 2000 RPM                      | 2400 RPM                      |
| Sound Level         | 41 dB(A)                      | 40 dB(A)                      |
| Max. Operating Temp | 50°C                          | 50°C                          |
| IP Rating           | IPX4                          | IPX4                          |

### ► Performance - XPLP125

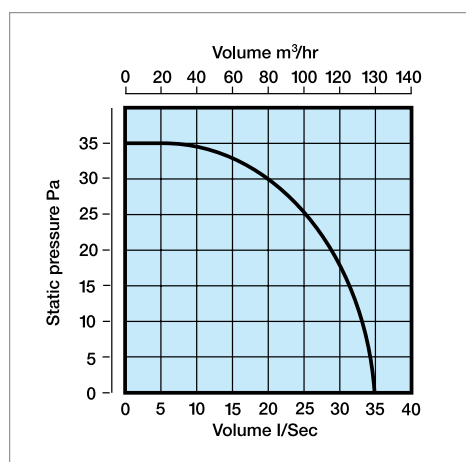

### ► Performance - XPLP150

